Altro Tegulis™

tile-effect wall panels



10 year product guarantee


altro.com

Altro Tegulis


tile-effect wall panels

White | W103
LRV 89

Hessian | 233
LRV 68

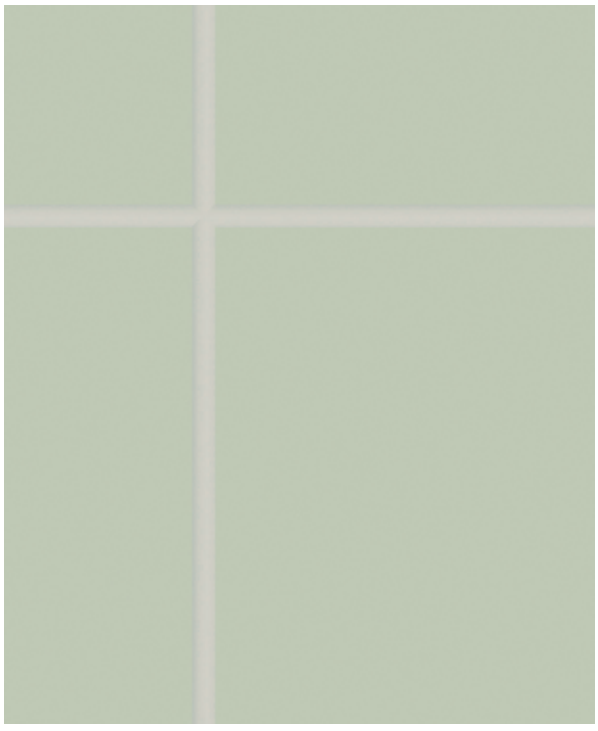

Serenity | 227
LRV 56

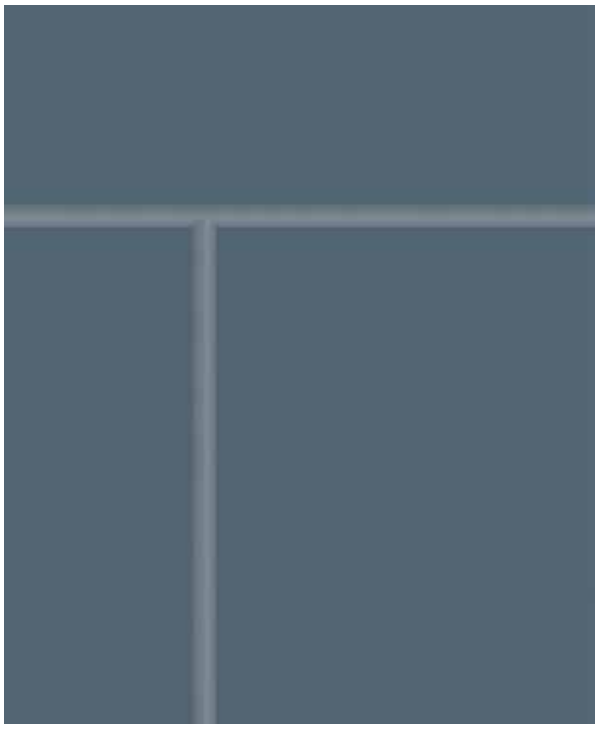

Twilight | 226
LRV 12

LRV = light reflectance value
Light reflectance values measured in accordance with BS 8493:2008.



Altro Tegulis


Tile-effect wall panels



Warm Elegance | 9917
LRV 61



White Elegance | 9919
LRV 80

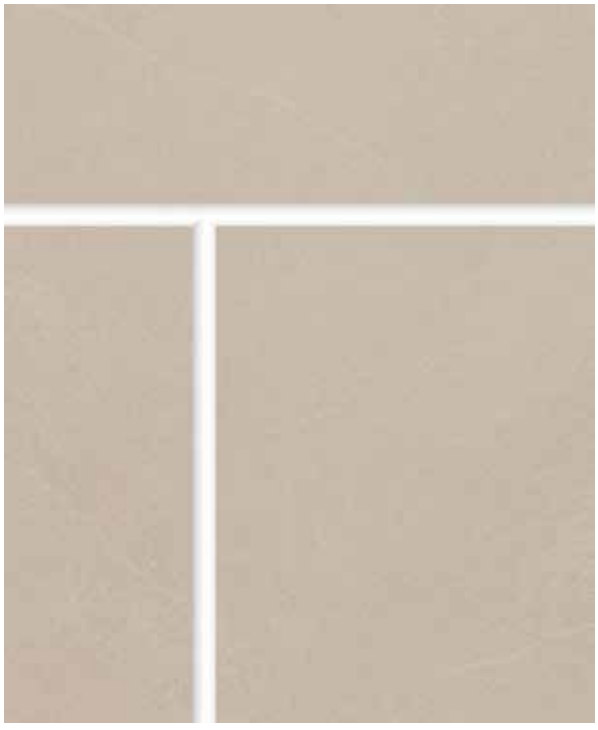

Soft Elegance | 9918
LRV 54



Warm Concrete | 9916
LRV 24

Exact material match with samples cannot be guaranteed.


White Woodgrain | 9915
LRV 79



Soft Woodgrain | 9901
LRV 52



White Mineral | 9905
LRV 61

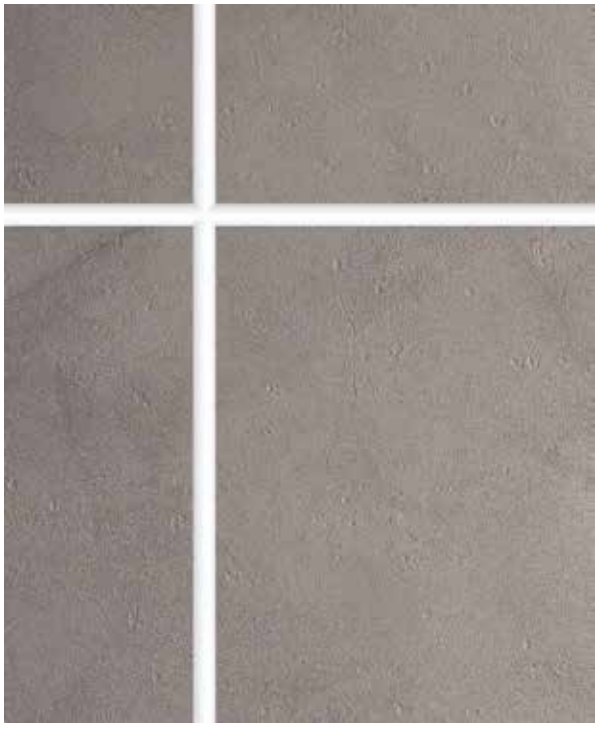

Urban Mineral | 9907
LRV 28

Altro Tegulis installation methods

Half-lap - recommended for use in wet areas, half-lap panel edges are machined to fit on top of each other creating a smooth, water-resistant joint. Use Altro sanitary sealant for secure, watertight joints.

Interlocking - for use in dry environments, tiles form an easy puzzle-like interlock, making the joint virtually invisible.




ESPRESSO
AMERICANO
CAPPUCCINO
ESPRESSO MACCHIATO
LATTE
FLAT WHITE
MILCHKAFFEE
ESPRESSO



Altro Tegulis™ tile-effect wall panels

Typical applications

Bathrooms. Non-commercial kitchens. Supermarket counters. Bars, cafes, restaurants. Spas. Hotels.

Technical information

Surface finish		Satin
Thickness		2.5 mm
Size		Contact Altro for details
Weight		3300 g/m² - 3600 g/m²
Maximum service temperature		60°C
E-modulus of elasticity	ISO 527	2980 MPa
Notched impact resistance	ISO 179/1ea	9.5 KJ/m²
Flexural strength	ISO 178	78 MPa
Tensile strength	ISO 527	53 MPa
Shore D hardness	ISO 868	76
Thermal conductivity - 'K Value'	EN 12524	0.17 W/mK
Water absorption	ISO 62	≤ 0.1%
Moisture vapour transmission rate (MVTR)	ASTM E96	≤ 0.12 g/m²/24h
Fire performance	EN 13501-1	B- s3, d0

CERTIFIED
ISO 9001
ISO 14001

2812
EN 15102

1121
EN 15102

NBS Plus

Installation and maintenance

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance and may affect or invalidate Altro's product guarantee. Technical information on installation and maintenance (including cleaning and staining) can be found at www.altro.com

altro, Altro, Altro Tegulis are trademarks of Altro Limited.

United Kingdom +44 (0) 1462 707 700 enquiries@altro.com

Subject to alteration.